



# Power Schottky Rectifier with common cathode

$$I_{FAV} = 2 \times 40 \text{ A}$$

$$V_{RRM} = 60 \text{ V}$$

$$V_F = 0.51 \text{ V}$$

| $V_{RSM}$ | $V_{RRM}$ | Type          |
|-----------|-----------|---------------|
| V         | V         |               |
| 60        | 60        | DSSK 80-006BR |

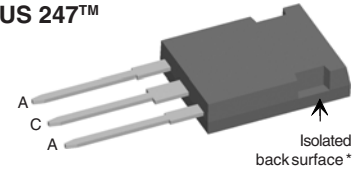
**ISOPLUS 247™**


C = Cathode, A = Anode

| Symbol         | Conditions   | Maximum Ratings |                  |
|----------------|--|-----------------|------------------|
| $I_{FRMS}$     |  | 70              | A                |
| $I_{FAV}$      | $T_C = 120^\circ\text{C}$ ; rectangular, $d = 0.5$   | 40              | A                |
| $I_{FAV}$      | $T_C = 120^\circ\text{C}$ ; rectangular, $d = 0.5$ ; per device                                | 80              | A                |
| $I_{FSM}$      | $T_{VJ} = 45^\circ\text{C}$ ; $t_p = 10 \text{ ms}$ (50 Hz), sine                              | 600             | A                |
| $E_{AS}$       | $I_{AS} = 20 \text{ A}$ ; $L = 100 \mu\text{H}$ ; $T_{VJ} = 25^\circ\text{C}$ ; non repetitive | 20              | mJ               |
| $I_{AR}$       | $V_A = 1.5 \cdot V_{RRM}$ typ.; $f = 10 \text{ kHz}$ ; repetitive                              | 2               | A                |
| $(dv/dt)_{cr}$ |  | 1000            | V/ $\mu\text{s}$ |
| $T_{VJ}$       |  | -55...+150      | $^\circ\text{C}$ |
| $T_{VJM}$      |  | 150             | $^\circ\text{C}$ |
| $T_{stg}$      |  | -55...+150      | $^\circ\text{C}$ |
| $P_{tot}$      | $T_C = 25^\circ\text{C}$   | 155             | W                |
| $F_C$          | mounting force with clip   | 20...120        | N                |
| $V_{ISOL}$     | 50/60 Hz, RMS; $t = 1 \text{ s}$   | 3000            | V~               |
| Weight         | typical  | 6               | g                |

**Features**

- International standard package
- Very low  $V_F$
- Extremely low switching losses
- Low  $I_{RM}$ -values
- Isolated and UL registered E153432

**Applications**

- Rectifiers in switch mode power supplies (SMPS)
- Free wheeling diode in low voltage converters

**Advantages**

- High reliability circuit operation
- Low voltage peaks for reduced protection circuits
- Low noise switching
- Low losses

**Dimensions see Outlines.pdf**

| Symbol     | Conditions  | Characteristic Values |         |
|------------|---|-----------------------|---------|
|            |   | typ.                  | max.    |
| $I_R$ ①    | $V_R = V_{RRM}$ ; $T_{VJ} = 25^\circ\text{C}$       |                       | 20 mA   |
|            | $V_R = V_{RRM}$ ; $T_{VJ} = 100^\circ\text{C}$      |                       | 200 mA  |
| $V_F$      | $I_F = 40 \text{ A}$ ; $T_{VJ} = 125^\circ\text{C}$ |                       | 0.51 V  |
|            | $I_F = 40 \text{ A}$ ; $T_{VJ} = 25^\circ\text{C}$  |                       | 0.55 V  |
|            | $I_F = 80 \text{ A}$ ; $T_{VJ} = 125^\circ\text{C}$ |                       | 0.74 V  |
| $R_{thJC}$ |   | 0.25                  | 0.8 K/W |
| $R_{thCH}$ |   |                       | K/W     |

Pulse test: ① Pulse Width = 5 ms, Duty Cycle &lt; 2.0%

Data according to IEC 60747 and per diode unless otherwise specified

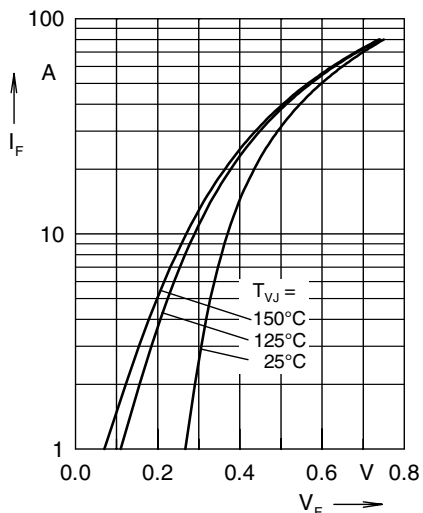


Fig. 1 Maximum forward voltage drop characteristics

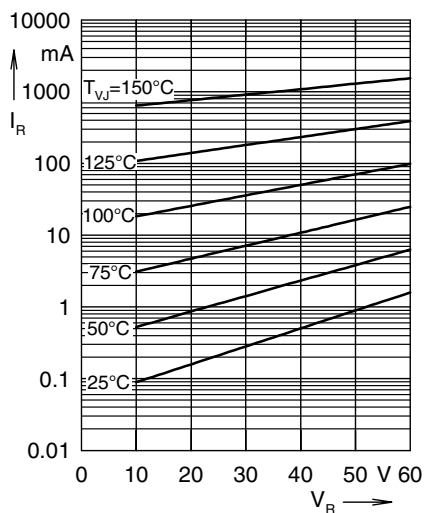


Fig. 2 Typ. value of reverse current  $I_R$  versus reverse voltage  $V_R$

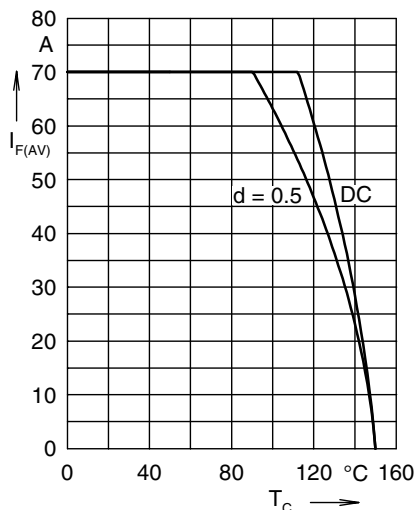
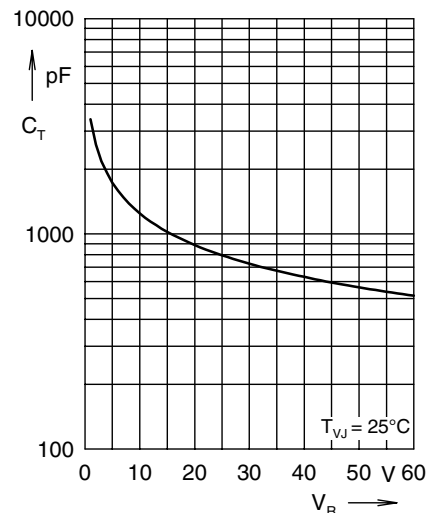


Fig. 4 Average forward current  $I_{F(AV)}$  versus case temperature  $T_C$

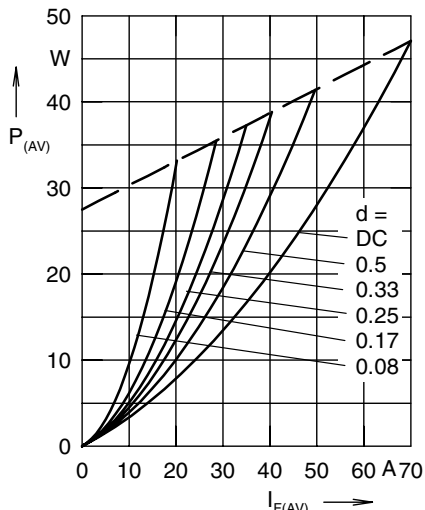


Fig. 5 Forward power loss characteristics

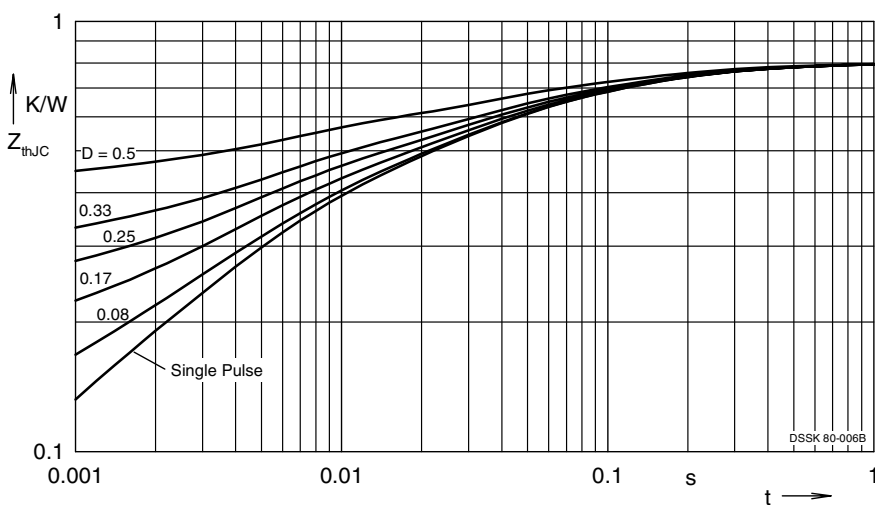


Fig. 6 Transient thermal impedance junction to case at various duty cycles

Note: All curves are per diode

IXYS reserves the right to change limits, test conditions and dimensions.